
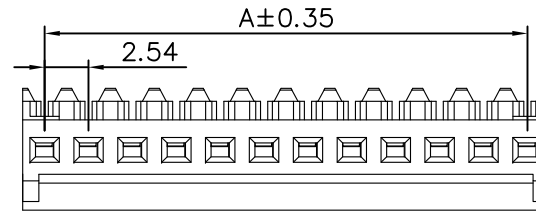
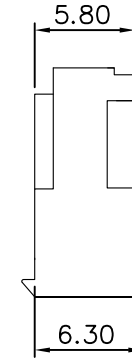
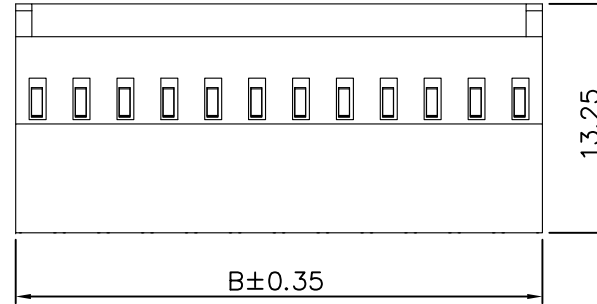
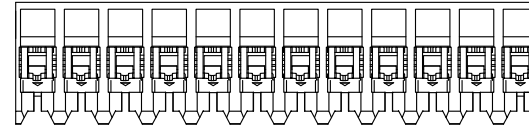



RoHS Compliant

| REV. | ECN. NO. | DESCRIPTION | DATE | APPD |
|------|----------|-------------|------|------|
| X1 | | ORIGINAL | | |
| | | | | |
| | | | | |

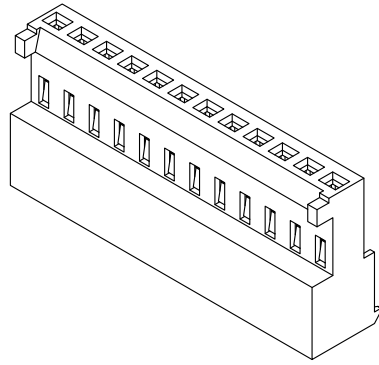

| No. of CKTS | Part No. | A | B |
|-------------|----------------|-------|-------|
| 02 | 0225260-022260 | 2.54 | 5.08 |
| 03 | 0225260-032260 | 5.08 | 7.62 |
| 04 | 0225260-042260 | 7.62 | 10.16 |
| 05 | 0225260-052260 | 10.16 | 12.70 |
| 06 | 0225260-062260 | 12.70 | 15.24 |
| 07 | 0225260-072260 | 15.24 | 17.78 |
| 08 | 0225260-082260 | 17.78 | 20.32 |
| 09 | 0225260-092260 | 20.32 | 22.86 |
| 10 | 0225260-102260 | 22.86 | 25.40 |
| 11 | 0225260-112260 | 25.40 | 27.94 |
| 12 | 0225260-122260 | 27.94 | 30.48 |
| 13 | 0225260-132260 | 30.48 | 33.02 |
| 14 | 0225260-142260 | 33.02 | 35.56 |
| 15 | 0225260-152260 | 35.56 | 38.10 |
| 16 | 0225260-162260 | 38.10 | 40.64 |
| 17 | 0225260-172260 | 40.64 | 43.18 |

Specifications:
 Rating:
 Current Rating: 3.0 Amp
 Voltage Rating: 250V AC/DC
 Operating Temperature Range: -25°~+85°C

Electrical:
 Contact resistance: 20m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 500V AC/Minute

Material And Finish:
 Insulator: Nylon 66 UL94V-2 Color: Red
 Contact: Brass
 Plated: Tin Plated

| | | | | | |
|--|---------------------------------------|-----------|---|------------------------------|---------------|
| EXTEND USE: mobile phones, digital camera, MP3, MP4, Medical, automotive and aerospace fields | | | TITLE : 2.54mm Pitch MTA 100 Connector Assembly | | |
| GENERAL TOLERANCE: | | UNIT: mm | APPD. : Allen Yang | DWG. NO. : 0225260 | |
| LINEAR: . ±0.30 .0 ±0.20 .00 ±0.10 .000 ±0.05 | ANGLES: . ±3° .0 ±2° .00 ±1° | MATERIAL: | CHKD. : Ann Xu | PART NO. : 0225260-XX2260 | |
| | | FINISHED: | DR. BY. : Jessa Lei 2012.6.28 | SHEET: 1/1 | SCALE: 1:1 |
| | | | | A4 | |