
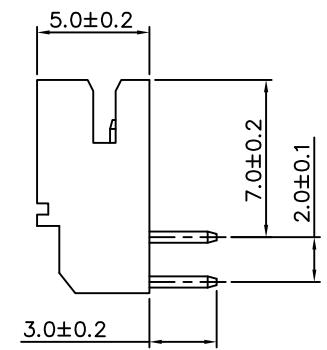
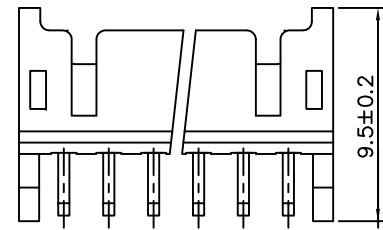
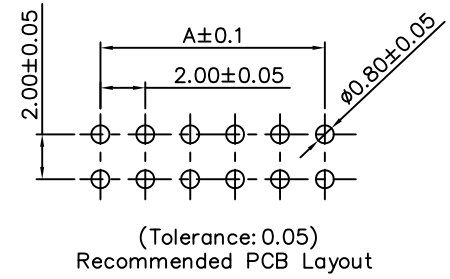


RoHS Compliant

| REV. | ECN. NO. | DESCRIPTION | DATE | APPD |
|------|----------|-------------|------|------|
| X1 | | ORIGINAL | | |
| | | | | |
| | | | | |

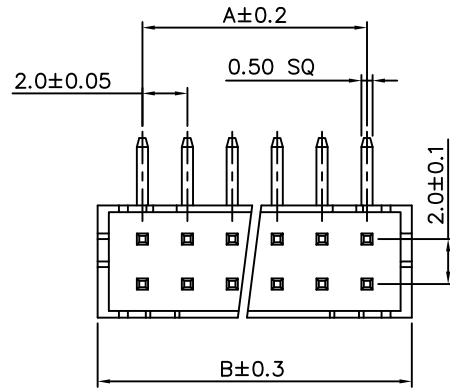


| No.of CKTS | Part No. | A | B |
|------------|----------------|-------|-------|
| 04 | 0220152-042121 | 2.00 | 6.00 |
| 06 | 0220152-062121 | 4.00 | 8.00 |
| 08 | 0220152-082121 | 6.00 | 10.00 |
| 10 | 0220152-102121 | 8.00 | 12.00 |
| 12 | 0220152-122121 | 10.00 | 14.00 |
| 14 | 0220152-142121 | 12.00 | 16.00 |
| 16 | 0220152-162121 | 14.00 | 18.00 |
| 18 | 0220152-182121 | 16.00 | 20.00 |
| 20 | 0220152-202121 | 18.00 | 22.00 |
| 22 | 0220152-222121 | 20.00 | 24.00 |
| 24 | 0220152-242121 | 22.00 | 26.00 |
| 28 | 0220152-282121 | 26.00 | 30.00 |
| 32 | 0220152-322121 | 30.00 | 34.00 |
| 34 | 0220152-342121 | 32.00 | 36.00 |
| 36 | 0220152-362121 | 34.00 | 38.00 |
| 40 | 0220152-402121 | 38.00 | 42.00 |

Specifications:
 Rating:
 Current Rating: 2.0 Amp
 Voltage Rating: 100V AC/DC
 Operating Temperature Range: -25~+85°C

Electrical:
 Contact resistance: 20m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 800V AC/Minute

Material And Finish:
 Insulator: Nylon 66 UL94V-0 Color: Natural
 Contact: Copper Alloy
 Plated: Tin Plated

| | | | | | |
|--|--|--|--|---|--|
| EXTEND USE: mobile phones, digital camera, MP3, MP4, Medical, automotive and aerospace fields | | TITLE : 2.0mm Pitch R/A Type Wire to Board Connector | |  | |
| GENERAL TOLERANCE: | | MATERIAL: | | | |
| LINEAR: . ±0.30 .0 ±0.20 .00 ±0.10 .000 ±0.05 | | ANGLES: . ±3° .0 ±2° .00 ±1° | | APPD. : Allen Yang | |
| | | QTY: | | PART NO. : 0220152-XX2121 | |
| | | FINISHED: | | SHEET: 1/1 | |
| | | DR. BY. : Jessa Lei 2012.6.28 | | SCALE: 1:1 | |
| | | | | A4 | |