
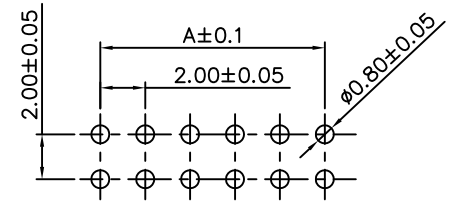
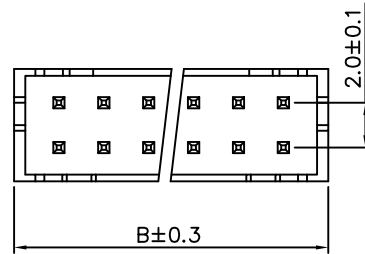


RoHS Compliant

REV.	ECN. NO.	DESCRIPTION	DATE	APPD
X1		ORIGINAL		

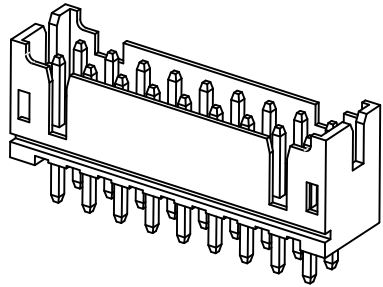



(Tolerance: 0.05)
Recommended PCB Layout

No.of CKTS	Part No.	A	B
04	0220151-042121	2.00	6.00
06	0220151-062121	4.00	8.00
08	0220151-082121	6.00	10.00
10	0220151-102121	8.00	12.00
12	0220151-122121	10.00	14.00
14	0220151-142121	12.00	16.00
16	0220151-162121	14.00	18.00
18	0220151-182121	16.00	20.00
20	0220151-202121	18.00	22.00
22	0220151-222121	20.00	24.00
24	0220151-242121	22.00	26.00
28	0220151-282121	26.00	30.00
32	0220151-322121	30.00	34.00
34	0220151-342121	32.00	36.00
36	0220151-362121	34.00	38.00
40	0220151-402121	38.00	42.00

Specifications:
Rating:
Current Rating: 2.0 Amp
Voltage Rating: 100V AC/DC
Operating Temperature Range: -25~+85°C

Electrical:
Contact resistance: 20m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 800V AC/Minute

Material And Finish:
Insulator: Nylon 66 UL94V-0 Color: Natural
Contact: Copper Alloy
Plated: Tin Plated

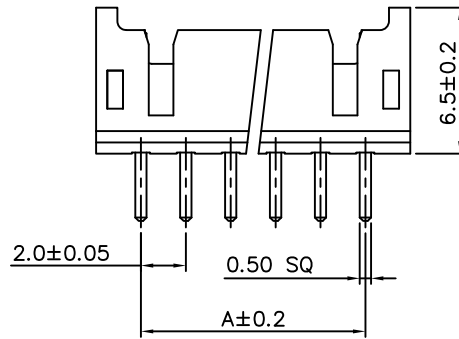

EXTEND USE: mobile phones, digital camera, MP3, MP4, Medical, automotive and aerospace fields			TITLE : 2.0mm Pitch Straight Type Wire to Board Connector		
GENERAL TOLERANCE:		UNIT: mm	MATERIAL:	APPD.: Allen Yang	
LINEAR: . ±0.30 .0 ±0.20 .00 ±0.10 .000 ±0.05	ANGLES: . ±3° .0 ±2° .00 ±1°	FINISHED:		CHKD.: Ann Xu	PART NO.: 0220151-XX2121
		DR. BY.: Jessa Lei 2012.6.28		SHEET: 1/1	SCALE: 1:1
				A4	