

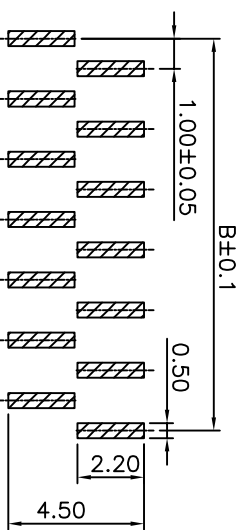
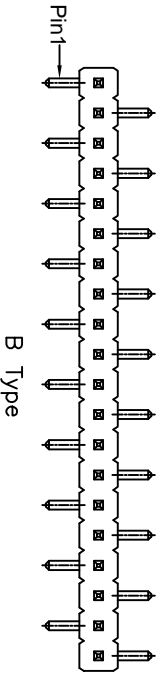


RoHS Compliant

REV.	ECN. NO.	DESCRIPTION	DATE	APPD
X1		ORIGINAL		

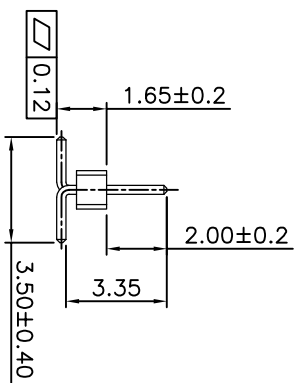

Recommended PCB Layout
(Tolerance:0.05)

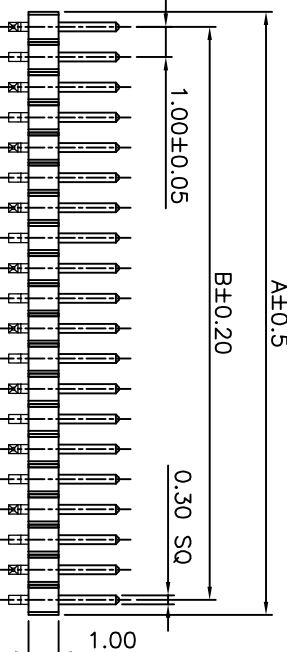

Specifications:
 Rating:
 Current Rating:0.8 Amp
 Voltage Rating:100V AC/DC
 Operating Temperature Range:-40°~+105°C

Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:500V AC/Minute

Material And Finish:
 Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:Gold Flash Over Nickel

NO.	Part No.	A	B
1	2410034-001	2.0	1.0
2	2410034-002	2.0	1.0
3	2410034-003	2.0	1.0
4	2410034-004	2.0	1.0
5	2410034-005	2.0	1.0
6	2410034-006	2.0	1.0
7	2410034-007	2.0	1.0
8	2410034-008	2.0	1.0
9	2410034-009	2.0	1.0
10	2410034-010	2.0	1.0
11	2410034-011	2.0	1.0
12	2410034-012	2.0	1.0
13	2410034-013	2.0	1.0
14	2410034-014	2.0	1.0
15	2410034-015	2.0	1.0
16	2410034-016	2.0	1.0
17	2410034-017	2.0	1.0
18	2410034-018	2.0	1.0
19	2410034-019	2.0	1.0
20	2410034-020	2.0	1.0
21	2410034-021	2.0	1.0
22	2410034-022	2.0	1.0
23	2410034-023	2.0	1.0
24	2410034-024	2.0	1.0
25	2410034-025	2.0	1.0
26	2410034-026	2.0	1.0
27	2410034-027	2.0	1.0
28	2410034-028	2.0	1.0
29	2410034-029	2.0	1.0
30	2410034-030	2.0	1.0
31	2410034-031	2.0	1.0
32	2410034-032	2.0	1.0
33	2410034-033	2.0	1.0
34	2410034-034	2.0	1.0
35	2410034-035	2.0	1.0
36	2410034-036	2.0	1.0
37	2410034-037	2.0	1.0
38	2410034-038	2.0	1.0
39	2410034-039	2.0	1.0
40	2410034-040	2.0	1.0
41	2410034-041	2.0	1.0
42	2410034-042	2.0	1.0
43	2410034-043	2.0	1.0
44	2410034-044	2.0	1.0
45	2410034-045	2.0	1.0
46	2410034-046	2.0	1.0
47	2410034-047	2.0	1.0
48	2410034-048	2.0	1.0
49	2410034-049	2.0	1.0
50	2410034-050	2.0	1.0

EXTEND USE: mobile phones, digital camera, MP3, MP4, Medical, automotive and aerospace fields		UNIT: mm		TITLE: 1.0mm Pitch Pin Header SMT Type		DWG. NO.: 0410034	
GENERAL TOLERANCE:		MATERIAL		APPD.: Allen Yang		PART NO.: 0410034-XX0101-051	
LINEAR:	ANGLES:	QTY:	CHGD.:	DR. BY.:	SHEET:	SCALE:	
±0.30	±3°		Ann Xu	Jessa Lei	1/1	1:1	A4
±0.20	±2°						
±0.10	±1°						
±0.05							

